


## Custom Rolled® Aluminum Coil

Tel: +1-203-239-5881



## UA's Great Customs...

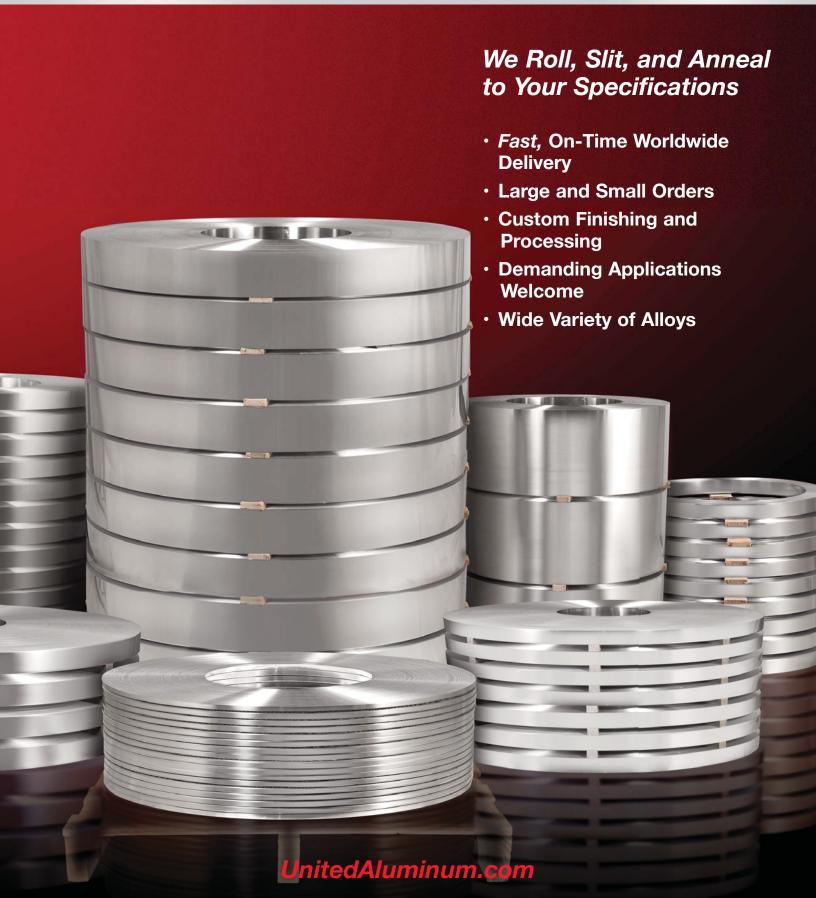

- All Gauge Thicknesses
- Tight Tolerances
- Custom Finishes



- From 6mm to 940mm wide
- Any Size Coil up to 1980mm OD



 Any size order, samples to truckloads, delivered fast.



 Our large inventory allows you to reduce your stock.



 Tailored to meet your most demanding forming needs.

## CAPABILITIES

As a specialty rolling mill, United Aluminum has unique rolling, slitting, and annealing capabilities to tailor aluminum coil to your most demanding specifications. We deliver both large and small orders fast to help you serve your customers better. Industry leading tolerances, metallurgical assistance, quick and reliable delivery, samples for new products... these are some of the reasons why many customers prefer our *Custom Rolled*® Aluminum Coil.

- SHORT LEAD TIME: Normal production time is 2-3 weeks plus delivery time.
- LARGE AND SMALL QUANTITIES: Trial orders to container amounts.
- ALLOYS: 1050, 1060, 1070, 1100, 1145, 1350, 2024, 3003, 3004, 3005, 3104, 5005, 5050, 5052, 5182, 5657, 5754, 6061, 7075, 9020, 9030.

  Brazing Sheet, & others available. Please inquire for other alloys of rolled aluminum coils.
- **TEMPERS:** Fully annealed (O-Temper) and all cold-rolled tempers.
- <u>Custom Rolled</u>® Aluminum Coil
   GAUGES: 0.1mm to 4.0mm Tight gauge tolerances to 1/4 commercial.
   WIDTHS: 6.0mm to 940mm Tight width tolerances.
- Additional Gauges: 4mm 8.255mm Widths 19mm 1879mm Subject to Inquiry. Inside Diameters: 152.4mm, 203.2mm, 254.0mm, 304.8mm, 406.4mm, 508.0mm, 609.6mm. Cores available.

Outside Diameter: 1981mm maximum. Coil Weight: Up to 7.9 kg per mm of width.

- **DEMANDING APPLICATIONS:** Deep drawing, anodizing quality, minimum earing, fine grain.
- SURFACES: Wide variety of rolled surfaces available, from 2 sides bright to matte.
  - Z-Mill Standard: 0.07-0.15 microns typical Ra, brighter than a conventional 4-Hi rolled surface.
  - Matte: 0.3-0.4 microns typical Ra.
  - Bright (One or two sides): 0.025-0.05 microns typical Ra.
  - Custom finishes are available. Please inquire.
- SPECIAL PROCESSING: Leveling, cut-to-length, cleaning. Please inquire.
- SPECIAL PACKING: Custom packaging to meet your requirements. Export packaging in conformance with IPPC International Standards.
- **TECHNICAL ASSISTANCE:** Metallurgical and engineering assistance available. Please inquire.
- \* Please inquire for lighter / heavier gauge thicknesses, other widths, and tolerances less than 1/2 commercial.

For a "virtual tour" or to request your quote online, visit us at UnitedAluminum.com or call:

Tel: +1-203-239-5881 • Fax: +1-203-239-4441

Email: Sales@UnitedAluminum.com



P.O. Box 215 • 100 United Drive • North Haven, Connecticut 06473-0215 U.S.A

